


## D1024 SERIES Adjustable EN2-4 Overhead Door Closers

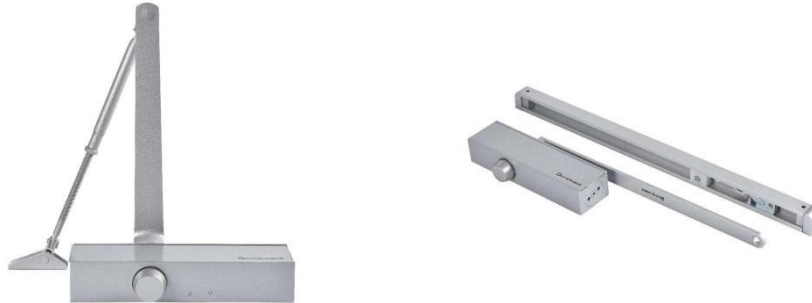

### STANDARD FEATURES

- **Certification:** CE Marked
- **Tested to EN1634:** WF Assessment Report No.:502523  
WF Test Report No.:503361/R
- **Spring Power:** Adjustable 2-4#
- **Durability:** 500,000 cycles above
- **Function:** Adjustable Closing speed  
Adjustable Latching speed  
Hold Open Optional  
Sliding Track arm Optional
- **Installation type:** Door leaf installation, Top Jamb installation, Parallel arm installation
- **Max. Opening:** 180 °
- **Suitability for fire protection doors:** Yes
- **Mechanism:** Rack & Pinion
- **Hand of door:** Non handed
- **Materials of Body:** Die-cast Aluminum
- **Materials of Arm :** Steel
- **Backcheck:** Yes
- **Delayed Action:** NO
- **Product Description:** Closing speed can be individually adjusted  
Hydraulic latching action which accelerates the door shortly before it is closed
- **Application:** Suitable for wooden door, metal door, and fire rated door
- **Leaf width (max.):** 1100mm
- **Leaf weight (max.):** 85KGS
- **Finish:** Silver, Brown, White,Black, Others upon request.
- **Warranty:** 5 Years

**AVAILABLE INSTALLATION TYPE:**



Model #	Spring power	Recommended Door Weight	RecommendedMax. Door Leaf Width (mm )	Notes
D1024	2-4#	20-85 KGS	850-1100mm	Sliding track arm optional

**PRODUCT DIMENSIONS:**

\*In case of unusually high or heavy doors, windy or draughty conditions, or special installations, a large power size of door closer should be used.

