

D2000H SERIES **Overhead EN3 Slide Track Door Closer-CE marked**



STANDARD FEATURES


- **Certification:** CE Marked
- **Spring Power:** Fixed EN3
- **Durability:** 500,000 cycles above
- **Function:** Adjustable Closing speed
Adjustable Latching speed
Hold Open Optional
Backcheck Optional
- **Arm type:** Slide track
- **Max. Opening:** 180 °
- **Fitting Application:** Slide track arm
- **Mechanism:** Rack & Pinion
- **Materials of Body:** Die-cast Aluminum
- **Materials of Arm :** Steel
- **Delayed Action:** NO
- **Tested to EN1154:** Report NO.WIL433044
- **Tested to EN1634:** WF report NO.422554
- **CE Marked:** CERTIFIRE Certificate NO.CF5800
- **EN 1154 Classification:** 483113
- **Application:** Suitable for wooden door, metal door, and fire rated door
- **Leaf width (max.):** 950mm
- **Leaf weight (max.):** 65KGS
- **Finish:** Silver, Brown, White,Black, Others upon request.
- **Warranty:** 5 Years

AVAILABLE INSTALLATION TYPE:



Model #	Spring power	Recommended Door Weight	RecommendedMax. Door Leaf Width (mm)	Notes
D2000H	3#	40-65 KGS	950 mm	Sliding track arm

PRODUCT DIMENSIONS:

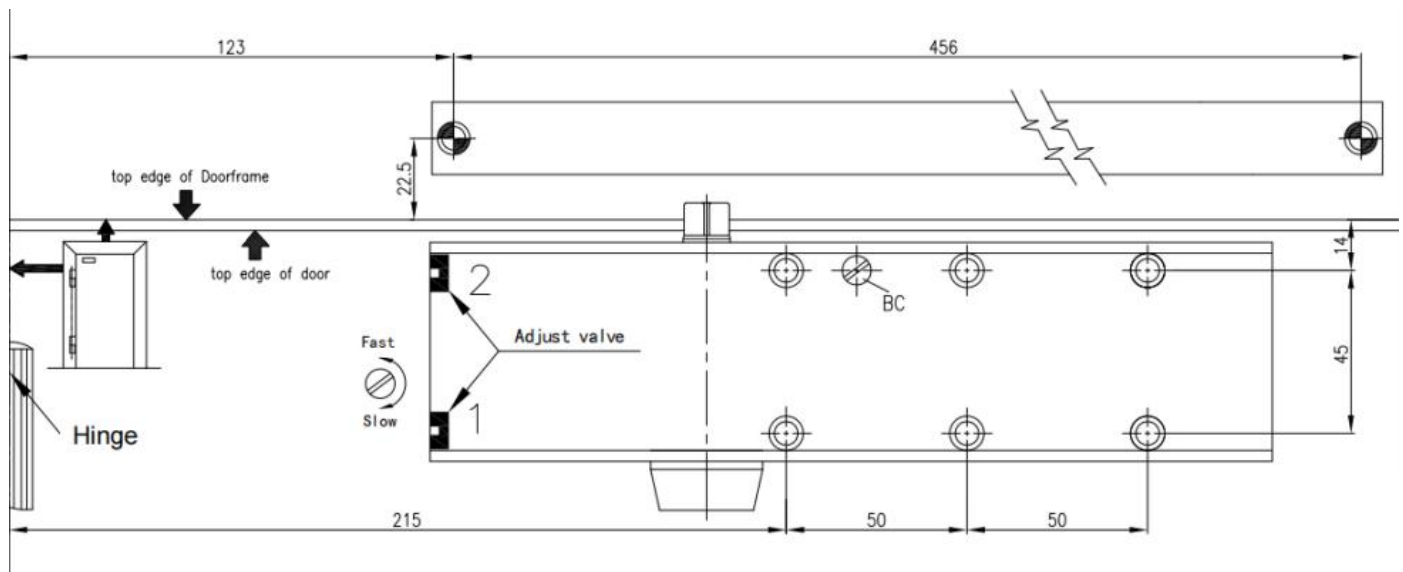

Control and protection of the door.

- The closing speed and final latch action adjustment valves ensure accurate control of the door's performance.
- The version with hold open arm is suitable when the door needs to be kept in a certain position in total safety.
- The versions supplied with the backcheck function protect the structure of the door if it is used improperly.