

D4016 SERIES **UL Listed Medium Duty Adjustable Door Closers**




STANDARD FEATURES

- **Certification:** BHMA Certified ANSI A156.4
ADA Compliant ANSI A117.1 Accessibility Code
UL/cUL Listed for up to 3 hours
UL10C Positive Pressure Rated
UL10B Neutral Pressure Rated
- **Spring Power:** Adjustable Size 1-6
- **Durability:** 2000,000 cycles above
- **Valves:** Adjustable latching and sweep speed valves
Adjustable backcheck valve - Standard
Delayed action valve - Optional
Staked valves - Standard
- **Material:** Aluminum Alloy
The recommended temperatures for prolonged closer use is between
40° F (-42° C) and 150° F (66° C)
- **Cover:** Full plastic cover - Standard
Slim line plastic cover - Optional
Full size plated metal cover - Optional
- **Spring:** Double heat treated steel, tempered springs
Precision machined, heat treated steel piston
- **Arms & Brackets:** Tri-Pack - Regular, parallel arm, and top jamb mount - Standard
15% power adjustment in standard arm for regular and top jamb mount
- **Optional Arms:** Hold Open Arm
Extra Heavy Duty Hold Open Stop Arm
Extra Heavy Duty Stop Arm
Extra Heavy Duty Arm
Extra Heavy Duty Hold Open Arm
Extra Heavy Duty Cushion Stop Arm
Extra Heavy Duty Hold Open Cushion Stop Arm

- **Hand of door:** Non handed
- **Fasteners:** Self-reaming, self-tapping wood and machine screws
Sex nuts and bolts
- **Door Thickness :** 1-3/4" (44 mm)
1-3/8" - 2-1/4" (36 mm - 57 mm) - Optional
- **Finish:** Silver, Brown, White, Black, Others upon request.
- **Warranty:** 10 Years
- **Cross reference** Norton 1600 series, LCN 1260, Sargent 1130, Dorma 7400 Series, Yale 50BC series, Arrow 900N series, Stanley D1650, Lawrence LH5016.

Dorhaus D4016 CUTAWAY VIEW

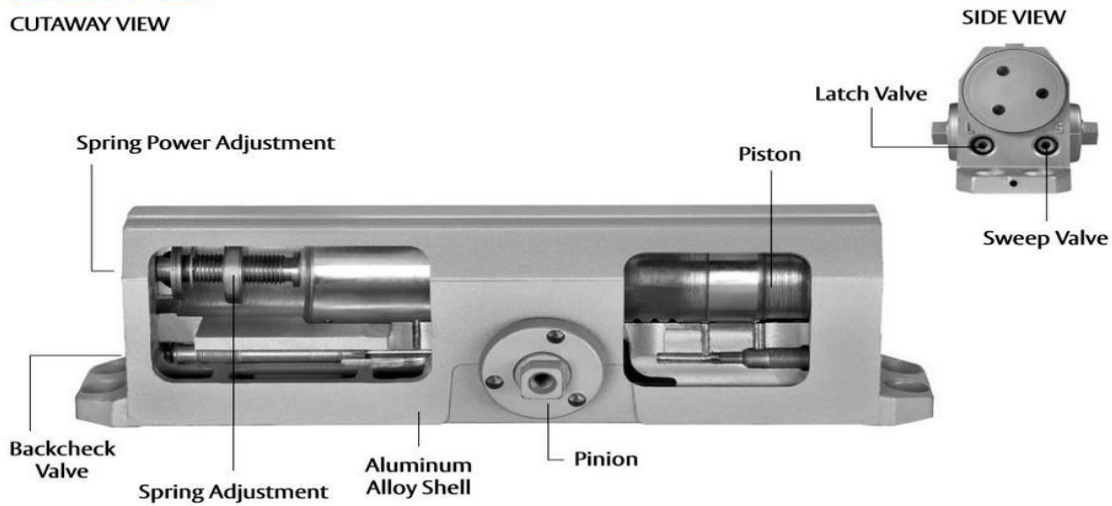


Spring omitted for illustration purposes

The D4016 Series features a single-piece cast aluminum body and a 1-3/8" heat-treated steel piston, a heat-treated pinion and staked valves. The D4016 Series standard door closer is certified ANSI/BHMA A156.4 Grade 1, is UL listed and is backed by a 10-year warranty.

AVAILABLE INSTALLATION TYPE:

The 3 methods for installing over head door closers

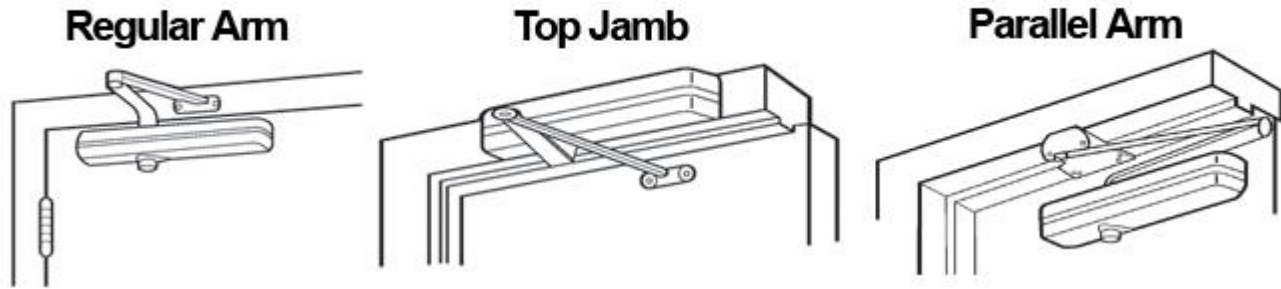

Model #	Spring power	Recommended Door Weight	Recommended Max. Door Leaf Width (mm)	Notes
D4016	1-6	20-150 KGS	1500 mm	Max 250lbs

*In case of unusually high or heavy doors, windy or draughty conditions, or special installations, a large power size of door closer should be used.

PRODUCT DIMENSIONS:

