

D9016 SERIES **UL Listed Extra Heavy Duty Door Closers**




STANDARD FEATURES

- **Certification:** BHMA Certified ANSI A156.4
ADA Compliant ANSI A117.1 Accessibility Code
UL/cUL Listed for up to 3 hours
UL10C Positive Pressure Rated
UL10B Neutral Pressure Rated
- **Spring Power:** Adjustable Size 1-6
- **Durability:** 2000,000 cycles above
- **Valves:** Adjustable latching and sweep speed valves
Adjustable backcheck valve - Standard
Delayed action valve - Optional
Staked valves - Standard
- **Material:** Cast Iron
The recommended temperatures for prolonged closer use is between 40° F (-42° C) and 150° F (66° C)
- **Cover:** Full plastic cover - Standard
Plated metal cover - Optional
- **Spring:** Double heat treated steel, tempered springs
Precision machined, heat treated steel piston
- **Arms & Brackets:** Tri-Pack - Regular, parallel arm, and top jamb mount - Standard
15% power adjustment in standard arm for regular and top jamb mount
- **Optional Arms:** Hold Open Arm
Extra Heavy Duty Hold Open Stop Arm
Extra Heavy Duty Stop Arm
Extra Heavy Duty Arm

- **Hand of door:** Extra Heavy Duty Hold Open Arm
Extra Heavy Duty Cushion Stop Arm
Extra Heavy Duty Hold Open Cushion Stop Arm
- **Optional Brackets:** Non handed
Regular Arm Mount - Narrow Top Rail
Parallel Arm Mount - Narrow Top Rail
- **Fasteners:** Self-reaming, self-tapping wood and machine screws
Sex nuts and bolts
- **Door Thickness :** 1-3/4" (44 mm)-Standard
1-3/8" - 2-1/4" (36 mm - 57 mm) - Optional
- **Finish:** Silver, Brown, White, Black, Others upon request.
- **Warranty:** 30 Years
- **Cross reference** LCN 4041, LCN 4040, LCN 4040xp, Norton 7500, Dorma 8900, Cal-Royal CR441, Hager 5100, Sargent 291, Dor-O-Matic SC70, Corbin Russwin DC3200 and DC6200, Yale 4400, Lawrence LH8016


Note : Installation As Per Template & Installation Instruction.

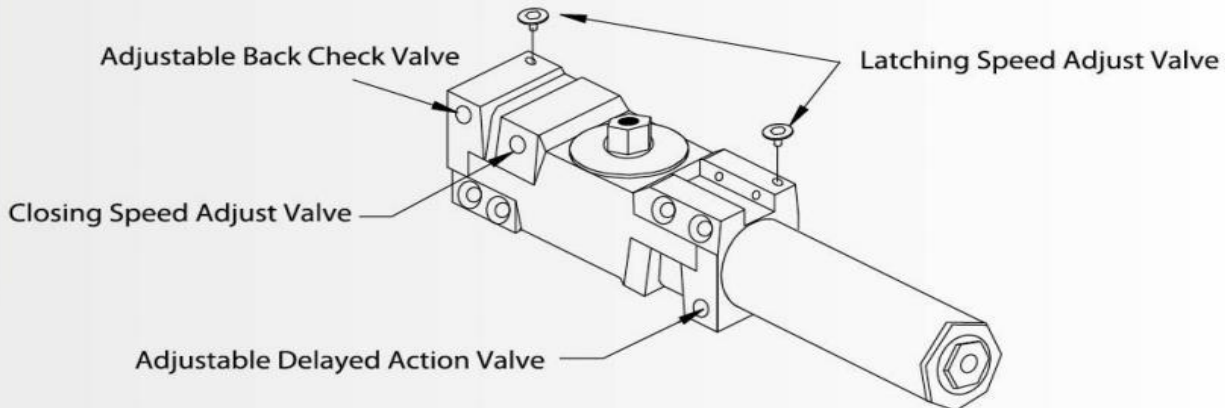

The D9016 Series is Dorrenhaus's most durable surface-mounted heavy-duty closer, designed for the most demanding high-use-and-abuse applications. It meets ANSI/BHMA A156.4 Grade 1 standards and ADA reduced opening force requirements. This closer is cUL listed and UL listed for self-closing doors without hold-open and boasts a 30-year limited warranty.

AVAILABLE INSTALLATION TYPE:

The 3 methods for installing over head door closers

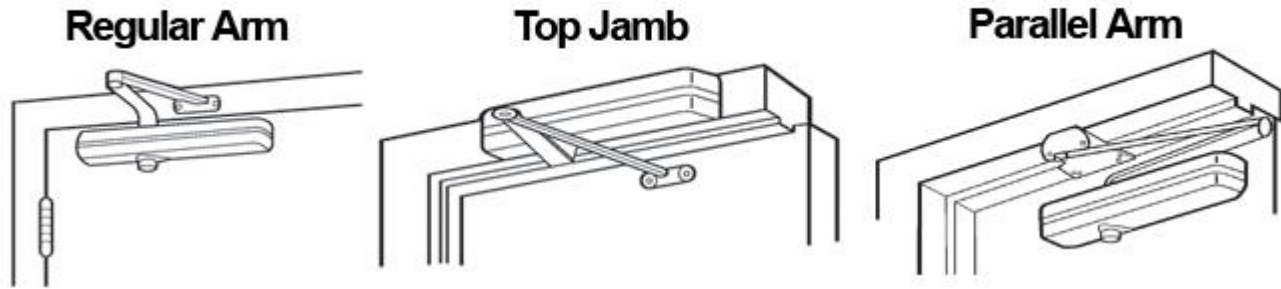

Model #	Spring power	Recommended Door Weight	Recommended Max. Door Leaf Width (mm)	Notes
D9016	1-6	20-150 KGS	1500 mm	Max 330lbs

*In case of unusually high or heavy doors, windy or draughty conditions, or special installations, a large power size of door closer should be used.

PRODUCT DIMENSIONS:

